

Thermoplastic Micro LED Exit Signs


Pace's PAC0433 series model is a slim-profile thermoplastic LED exit sign that offers modern design, including a standard flat faceplate, long-lasting and energy-efficient LEDs, and uniform illumination in an economical package.



Features

- Dual-voltage input (20V/277V)
 - Maintenance-free nickel-cadmium battery and RC/RCS versions
Maintenance-free nickel-metal hydride battery
 - Energy-saving LED
 - Optional Self-Diagnostic version monitors battery/charger failure, battery disconnect and lamp failure
 - Optional Remote-Capable version offers up to an additional 3.4 Watts for 90 minutes
 - Injection-molded, high-impact, UV-stabilized, UL94 V-0 thermoplastic construction in white or black finish
 - Snap-fit faceplate design for installation without tools
 - Removable universal chevrons for directional indications
 - Top, back, J-box or end mounting through universal mounting plate and canopy
 - Universal single face and double face (extra faceplate included)
 - Temp rating: 20°-30° damp
 - DOE and CEC Registered
 - UL 924 Listed for damp location
 - CUL Listed
- Master Carton Quantity 6pc

Dimensions

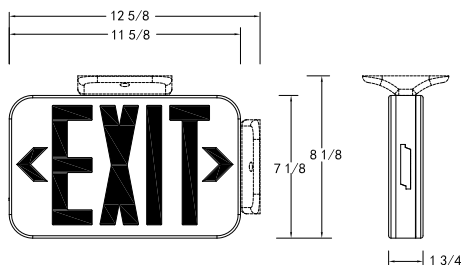

Ordering Information

¹ Options may be combined

Series	Operation	Number of Faces	Letter Color	Finish	Options	Example Cat #
PAC0433	Blank = AC Only B = Battery Backup	1 = Single Face 2 = Double Face	R = Red G = Green	W = White B = Black	Blank = Standard Version SD = Self-Diagnostic Version ¹ RC = Remote Capable Version ¹	PAC0433B2RWSD